

## 30'x 80' Gothic High Tunnel



Star Structure  
Gothic Arch

GRIZZLY HILL GREENHOUSES

Ray & Cheri Diggins  
14617 Grizzly Hill Rd  
Nevada City, CA 95959  
530-265-9495

*NRCS Grant Approved  
COMPLETE!  
All Components INCLUDED*

### Gothic Arch Pro Growers Package

30' Wide w/ 6+ foot sidewall  
5 ft OC w/ 1 7/8" 17 Frames) Frames.095 Ga  
3 Purlins & Heavy Duty Connecting Hardware  
2 3/8" Groundposts, (34 pcs.)  
Wirelock Track and Wire (fastens cover)  
All Frame & Endwall Heavy Duty Hardware  
Complete Instructions and Live Support  
48' X 100' Cover required see below.

**Frame & Hardware Kit \$6450**

#### COVERS & Endwall Covering OPTIONS:

10 mil Woven Poly 6 yr Cover & End Walls  
48x100 = **\$1350**

6 mil Thermal Poly Cover & End Walls  
48x100 = **\$750**

#### OPTIONS Build Your Custom Kit

**Manual Roll-Up Sidewalls (Geared Crank, Tube & Clips)- \$425 /side**

**Ventilation Kit: (2) 30" Shutter Fans & Two (2) 48" Inlet Shutters & Thermostat- \$1850**

Horizontal Air Flow Fans, Variable Speed (900- 3000 cfm)- (\$99 ea)

30' Prefab Endwall Kit- w/ Double Doors or Man Door & Jams -Galvanized Call!


4 Wind Braces (high wind kit) & Hardware **\$300**

35 year Woven Ground Cloth 12' x 100ft - **\$250**

125 Btu LB White Therma Grow Heater & Power Vent/Thermostat - Call for Price

12-20 mil Woven Fabric Sidewalls & Endwalls- **Call!**

\*Current Price of Covering Material may vary

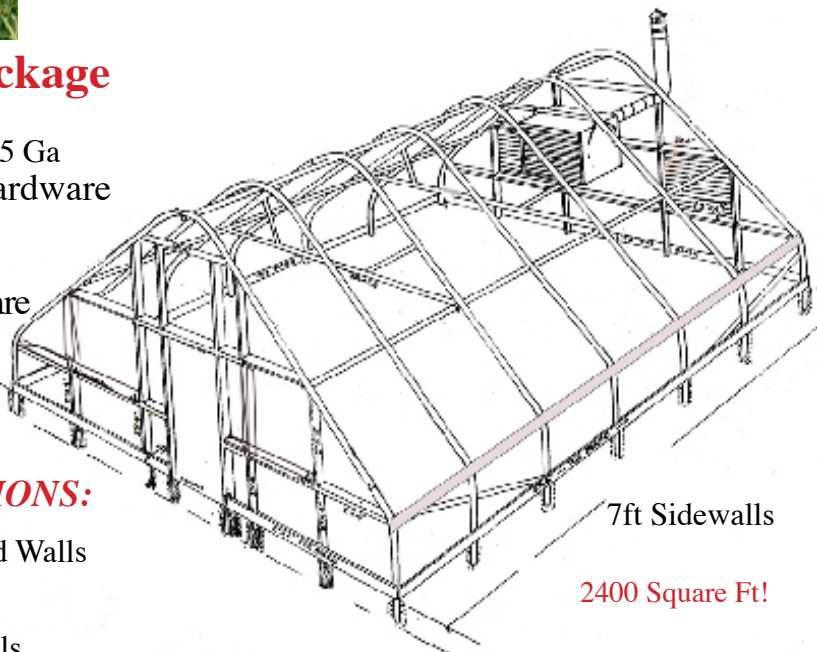

7ft Sidewalls

2400 Square Ft!

> **AUTO INTERIOR LIGHT DEPO KIT AVAILABLE FOR THIS KIT!**

>> **SEE OPTIONS LIST (Top of Page) FOR OTHER OPTIONS AVAILABLE! <<**

**SPRING 2017 Sale = \$9550**

Frame Kit=\$6450 + Solaroof Cover= \$1350 + Ventilation Kit=\$1850+  
Wind Kit= \$300 +Roll-up Sides (2)=\$850+= \$10800 =w/package discount= \$9550